

## Screw and Nail anchor Total-Fixx



### Characteristics

- **Material Plug** PA-6
- **Material Nail** Steel, tensile strength 500-700 N/mm<sup>2</sup>
- **Surface Nagel** Electro galvanised
- **Drive** Pozidrive 2 (PZ 2)


Pull-Out value*	TF 5 x 30	TF 6 x 40
<b>Concrete</b>	0,15 kn	0,15 kn
<b>Brick</b>	0,07 kn	0,10 kn
<b>Plasterboard</b>	0,07 kn	0,10 kn
<b>Cellular concrete</b>	0,13 kn	0,14 kn

\*These are average pull-out values with a min. safety factor of 5.

### Application

- To be used for a thickness up to 5 mm
- Total-Fixx is pre assembled and suitable for pass-through fixing
- Plug is silicone- and halogene free

### Knocking in or screwing

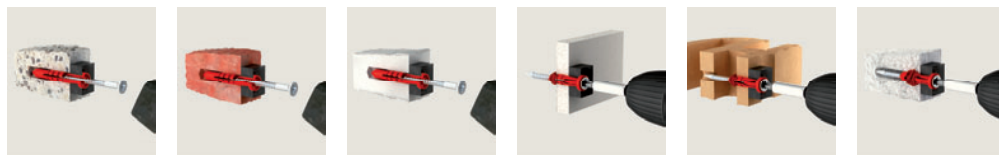

- Knocking in into concrete, brick or limestone
- Screwing into plasterboard, hollow brick or cellular concrete

### Screw and Nail anchor Total-Fixx (PL067/068)

Type	Description	Pluglength mm	Plug-Ø mm	Contents PU pcs	Weight kg/PU	Shipping box PU	GTIN	Item No.
<b>PL067</b>	TF 5 x 30	30	5	200	0,55	10	8713678701224	<b>970122</b>
<b>PL068</b>	TF 6 x 40	40	6	200	0,84	10	8713678701651	<b>970165</b>

